


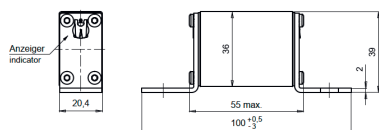


690/700 V NH 000 / DIN 80

usE180276



20 282 20/20 282 21

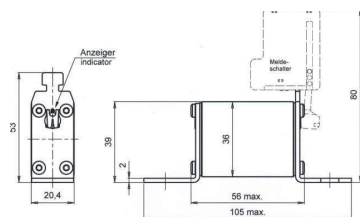

20 558 20

Verpackungseinheit / Packing unit: 6/3 Stück / 6/3 pieces

Betriebsklasse / Class
aR

IEC 60 269-1
IEC 60 269-4
UL 248-13

Artikel Nr. Article No.	Größe Size	Bemessungsstrom Rated Current
		A
20 282 20/20 282 21	NH000/DIN80	32-400
20 558 20*		

Bemessungsausschaltvermögen / Rated breaking capacity 200 kA @ 700 V

Bemessungsstrom Rated Current	Artikel Nr. Article No.			Gewicht Weight	Bemessungs- spannung Rated Voltage		Schmelz- integral Pre-Arcing- I ² t-Value	Ausschalt- integral Total I ² t-Value @ AC 660 V	Leistungs- abgabe Power Loss
A	mit Kennmelder with indicator	o. Kennmelder without indicator	für ext. Meldeshalter/ for ext. switch**	kg / 1	IEC 60269- 4	UL 248- 13	A ² s	A ² s	W
32	20 282 20.32	20 282 21.32	20 558 20.32	0,13*	690	–	52	290	8
35	20 282 20.35	20 282 21.35	20 558 20.35	0,13*	690	700	66	360	9
40	20 282 20.40	20 282 21.40	20 558 20.40	0,13*	690	700	90	500	10
50	20 282 20.50	20 282 21.50	20 558 20.50	0,13*	690	700	140	700	12
63	20 282 20.63	20 282 21.63	20 558 20.63	0,13*	690	700	250	1400	14
80	20 282 20.80	20 282 21.80	20 558 20.80	0,13*	690	700	470	2600	18
100	20 282 20.100	20 282 21.100	20 558 20.100	0,13*	690	700	730	4.000	22
110	20 282 20.110	20 282 21.110	20 558 20.110	0,13*	690	700	890	4.900	24
125	20 282 20.125	20 282 21.125	20 558 20.125	0,13*	690	700	1.300	7.200	26
150	20 282 20.150	20 282 21.150	20 558 20.150	0,13*	690	700	2.000	11.000	29
160	20 282 20.160	20 282 21.160	20 558 20.160	0,13*	690	700	2.800	15.400	32
180	20 282 20.180	20 282 21.180	20 558 20.180	0,13*	690	700	3.700	20.400	35
200	20 282 20.200	20 282 21.200	20 558 20.200	0,13*	690	700	4.500	25.000	39
225	20 282 20.225	20 282 21.225	20 558 20.225	0,13*	690	700	6.600	37.000	44
250	20 282 20.250	20 282 21.250	20 558 20.250	0,13*	690	700	8.000	44.000	47
315	20 282 20.315	20 282 21.315	20 558 20.315	0,13*	690	700	14.000	77.000	58
350	20 282 20.350	20 282 21.350	20 558 20.350	0,13*	500	–	23.800	(@ AC 550 V) 76.000	56
400	20 282 20.400	20 282 21.400	20 558 20.400	0,13*	500	–	32.100	(@ AC 550 V) 106.000	70

* 20 558 20: 0,15 kg/1

** Optional: GL-Meldeshalter siehe [Art.Nr. 28 002 01 ff](#)
GL-switch see [art.-no. 2800201 ff](#).

Applikationskoeffizienten / Application coefficients (Weiterführende Informationen [hier zum Download](#) / for more information [download here](#))



a	A2	B1 max.	B2	Cf3
130	06	1,25	06	08

690/700 V

NH 000 / DIN 80

usE180276

Zeit/Strom-
Kennlinien
Time-current
characteristics

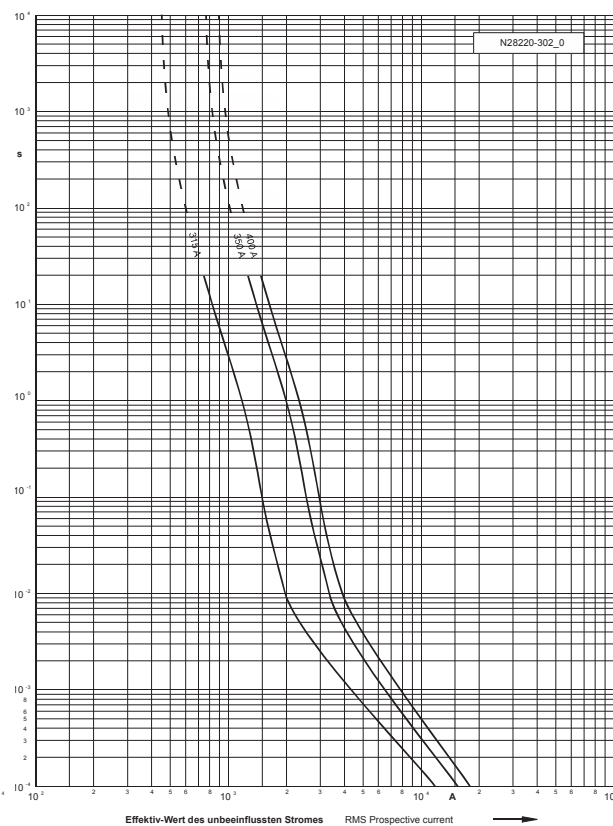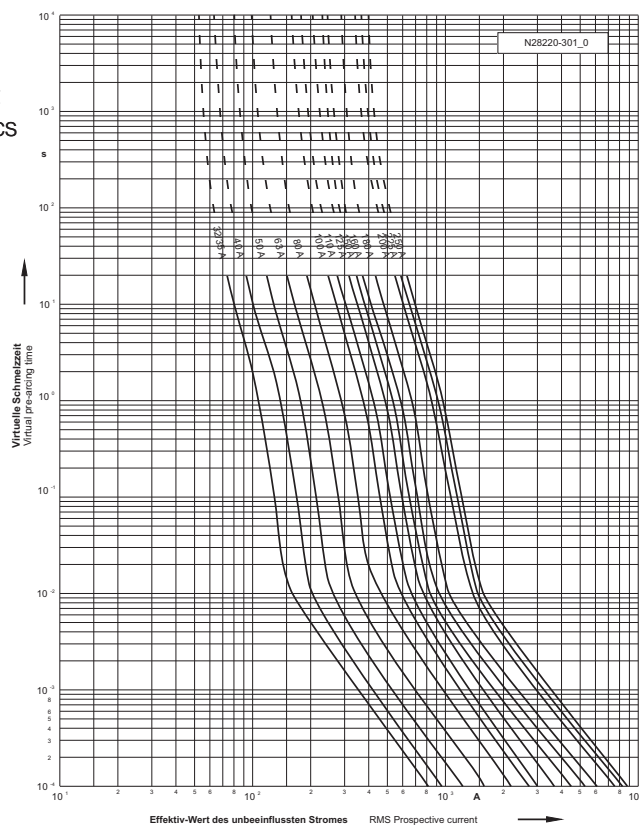

Durchlass-Strom
Cut-off current

