




690/700 V

NH 000 BS 70

usE180276



20 559 20/20 559 21



20 559 22

Verpackungseinheit / Packing unit: 6/3 Stück / 6/3 pieces

Betriebsklasse / Class
aR

IEC 60 269-1
IEC 60 269-4
UL 248-13

Bemessungs- spannung Rated Voltage	Artikel Nr. Article No	Größe Size	Bemessungsstrom Rated Current
V			A
690 / 700	20 559 20/20 559 21** 20 559 22**	NH 000	32-400

** kein UL

Bemessungsausschaltvermögen / Rated breaking capacity 200 kA @ 700 V

Bemessungsstrom Rated Current	Artikel Nr. Article No.			Gewicht Weight	Bemessungs- spannung Rated Voltage		Schmelz- integral Pre-Arcing- I ² t-Value	Ausschalt- integral Total I ² t-Value @ AC 660 V	Leistungs- abgabe Power Loss
	mit Kennmelder with indicator	ohne Kennmelder without indicator	für ext. Meldeschalter/ for ext. switch**		IEC 60269-4	UL 248-13			
A				kg / l	V	V	A²s	A²s	W
32	20 559 20.32	20 559 21.32	20 559 22.32	0,13*	690	–	52	290	8
35	20 559 20.35	20 559 21.35	20 559 22.35	0,13*	690	700	66	360	9
40	20 559 20.40	20 559 21.40	20 559 22.40	0,13*	690	700	90	500	10
50	20 559 20.50	20 559 21.50	20 559 22.50	0,13*	690	700	140	700	12
63	20 559 20.63	20 559 21.63	20 559 22.63	0,13*	690	700	250	1.400	14
80	20 559 20.80	20 559 21.80	20 559 22.80	0,13*	690	700	470	2.600	18
100	20 559 20.100	20 559 21.100	20 559 22.100	0,13*	690	700	730	4.000	22
110	20 559 20.110	20 559 21.110	20 559 22.110	0,13*	690	700	890	4.900	24
125	20 559 20.125	20 559 21.125	20 559 22.125	0,13*	690	700	1.300	7.200	26
150	20 559 20.150	20 559 21.150	20 559 22.150	0,13*	690	700	2.000	11.000	29
160	20 559 20.160	20 559 21.160	20 559 22.160	0,13*	690	700	2.800	15.400	32
180	20 559 20.180	20 559 21.180	20 559 22.180	0,13*	690	700	3.700	20.400	35
200	20 559 20.200	20 559 21.200	20 559 22.200	0,13*	690	700	4.500	25.000	39
225	20 559 20.225	20 559 21.225	20 559 22.225	0,13*	690	700	6.600	37.000	44
250	20 559 20.250	20 559 21.250	20 559 22.250	0,13*	690	700	8.000	44.000	47
315	20 559 20.315	20 559 21.315	20 559 22.315	0,13*	690	700	14.000	77.000	58
350	20 559 20.350	20 559 21.350	20 559 22.350	0,13*	500	–	23.800	(@ AC 550 V) 76.000	56
400	20 559 20.400	20 559 21.400	20 559 22.400	0,13*	500	–	32.100	(@ AC 550 V) 106.000	70

* 20 559 22: 0,15 kg/l

** Optional: GL-Meldesalter siehe [Art.Nr. 28 002 01 ff](#)
GL-switch see [art.-no. 2800201 ff](#).

Applikationskoeffizienten / Application coefficients (Weiterführende Informationen [hier zum Download](#) / for more information [download here](#))



a	A2	B1 max.	B2	Cf3
130	06	1,25	06	08

690/700 V

NH 000 BS 70

c_{us}E180276

Zeit/Strom-
Kennlinien
Time-current
characteristics

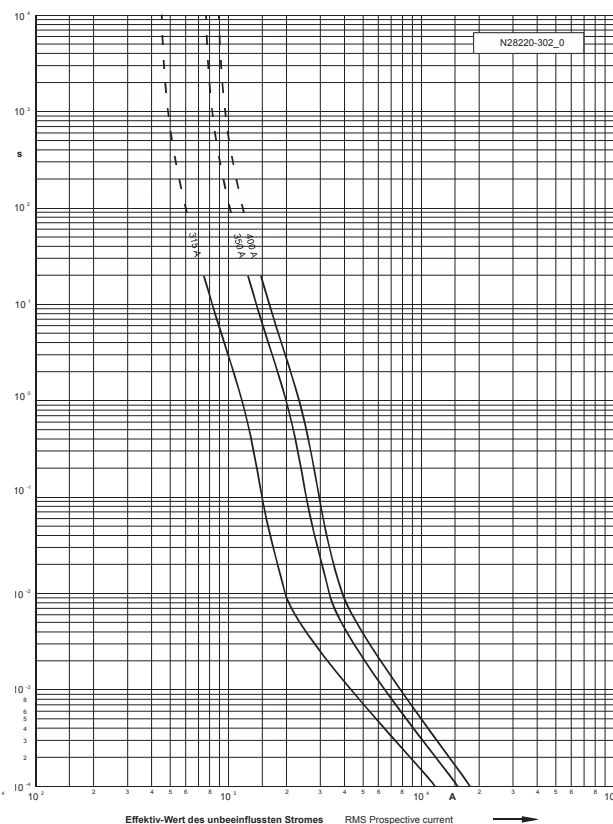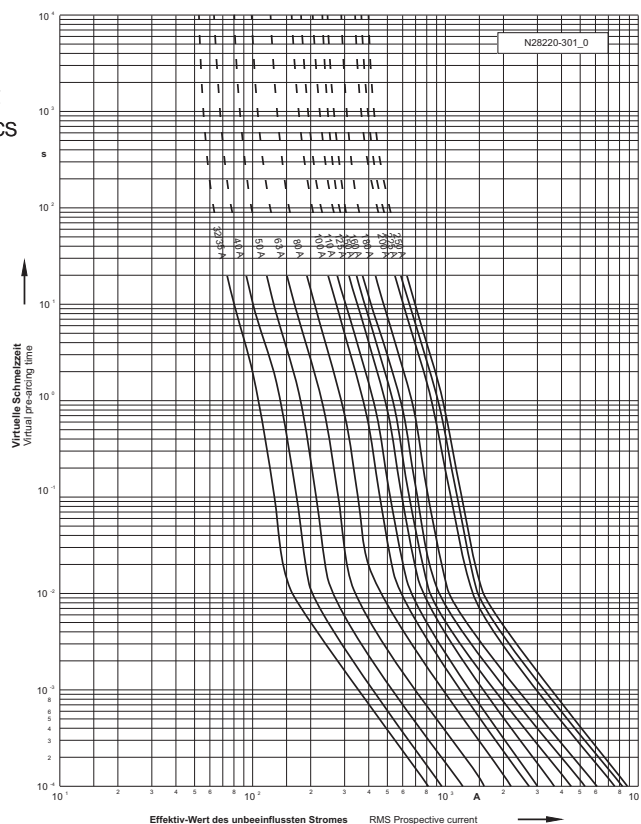

Durchlass-Strom
Cut-off current

